



From leak-proof tray sealing for case-ready proteins to flexible packaging for healthcare, Ossid packaging solutions are ideal for fresh and processed meats, convenience foods, consumer goods, and medical devices. Ossid manufactures industry-leading tray overwrappers and sealers, weigh/price-labeling equipment, case scales, and horizontal thermoform fill seal machinery for companies of all sizes. Ossid is a product brand of ProMach, a global leader in packaging line solutions. As part of the ProMach Flexibles business line, Ossid helps our packaging customers protect and grow the reputation and trust of their consumers. ProMach is performance, and the proof is in every package. Learn more about Ossid at [www.Ossid.com](http://www.Ossid.com) and more about ProMach at [www.ProMachBuilt.com](http://www.ProMachBuilt.com).

4000 College Road  
 Battleboro, NC 27809  
 P: 252-446-6177  
 TOLL FREE: 800-334-8369

E: [Ossid@ProMachBuilt.com](mailto:Ossid@ProMachBuilt.com)  
[Ossid.com](http://Ossid.com)



# REETRAY 30

## SEMI-AUTOMATIC TRAY SEALER



# ReeTray 30

SEMI-AUTOMATIC TRAY SEALER


The ReeTray 30 is a semi-automatic tray sealing machine designed to meet the production needs of small to medium size processors. It is also ideal for large processors who test market products in a laboratory setting prior to product launch.

Ossid, as the U.S. master distributor of the ReePack brand provides all sales and support including parts and service and training.

The ReeTray 30 is simple to set up, and its functionality makes this entry level machine a great first step into packaging machinery. It can produce ambient, modified atmosphere packaging (MAP) and vacuum skin pack (VSP). Featuring rugged stainless steel construction, manual or semi-automatic drawer feed and interchangeable tooling that delivers fast changeover between tray sizes.




*Designed for growing markets requiring a robust, affordable solution for tray sealing and vacuum skin pack applications.*

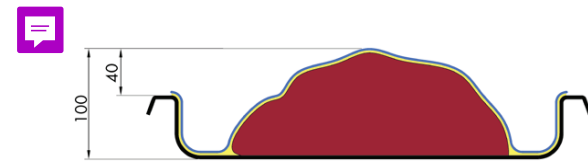


## DIE-SETS FOR M.A.P. & SKIN




**FORMAT 1.1**  
Max. 430 x 305 mm  
Max. H 95 mm



**FORMAT 2.1**  
Max. 205 x 305 mm  
Max. H 95 mm




**FORMAT 1.2**  
Max. 430 x 305 mm  
Max. H 95 mm



**FORMAT 3.1**  
Max. 130 x 305 mm  
Max. H 95 mm


## DIE-SETS FOR M.A.P.




**FORMAT 2.2**  
Max. 205 x 142 mm  
Max. H 95 mm



**FORMAT 3.2**  
Max. 130 x 142 mm  
Max. H 95 mm



**FORMAT 2.3**  
Max. 205 x 95 mm  
Max. H 95 mm



**FORMAT 4.1**  
Max. 95 x 305 mm  
Max. H 95 mm

## TYPICAL PRODUCT SPECIFICATIONS

<b>Overall dimensions</b>	710 x 1080 x 1600 mm	<b>Diameter of film support shaft</b>	70 - 76 mm
<b>Approx. weight included pump</b>	Ca. 215 Kg	<b>Vacuum pump</b>	60 m3/ h
<b>Max tray dimensions, ext.</b>	430 x 305 mm	<b>Electrical supply</b>	3/N/PE AC 400 V 50 Hz
<b>Max tray depth (opt.)</b>	95 (150) mm	<b>Power consumption</b>	Max 4,9 Kw
<b>Max width of film sealing</b>	470 mm	<b>Compressed air</b>	6 bar - 7 NI / c
<b>Max diameter of web roll</b>	300 mm	<b>Productivity*</b>	Up to 5 cycles / min.